

9077 Double Check Valve DZR


FI x FI

KEY FEATURES

- Screwed F/F BSP Parallel (ISO 228/1) ends
- Conforms with EN13959
- Prevention of back flow and back syphonage contamination
- Suitable for Fluid Categories 1, 2 & 3

TECHNICAL DATA

- Max pressure: 16 bar
- Working temp: -10° to 85°C

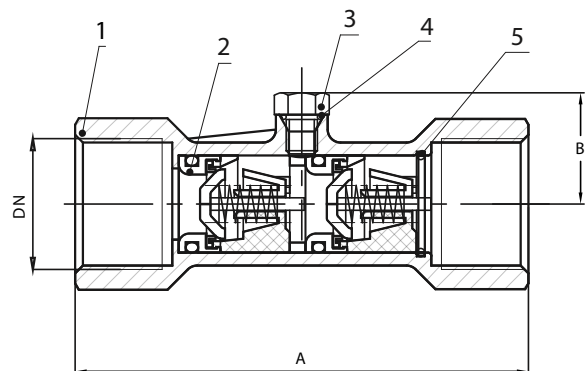

Code	DN	A	B	Kv	Kgs
PV9077100	1/2"	71	17.5	3.7	0.11
PV9077200	3/4"	83	20	7.1	0.17
PV9077300	1"	98	22.8	10.3	0.28
PV9077500	1½"	134	30	26.0	0.64
PV9077600	2"	173	35	42.5	1.19

No.	Part Name	Materials
1	Body	DZR Brass
2	Non-return core	POM
3	Screw	Brass HPb59-T
4	O-Ring	NBR
5	Catch Spring	Stainless Steel 304

