

Description


- Suitable for hot and cold water, heating and chilled water systems.
- Connect with ϕ 16*2 multilayer pipe.
- Use the wrench on opposite 24.
- Compatible with pert pipe or pert-al-pert pipe.
- THREADS: G3/4 (ISO 228 threads)

Performance


Maximum operating pressure	16ba
Maximum operating temperature	95°C
Maximum peak temperature	110°C (1hr)

Materials

NO.	Components	Material
A	Bonnet	SUS304
B	Fereule	HPb57-3
C	O - Ring	EPDM
D	Pipe	HPb57-3

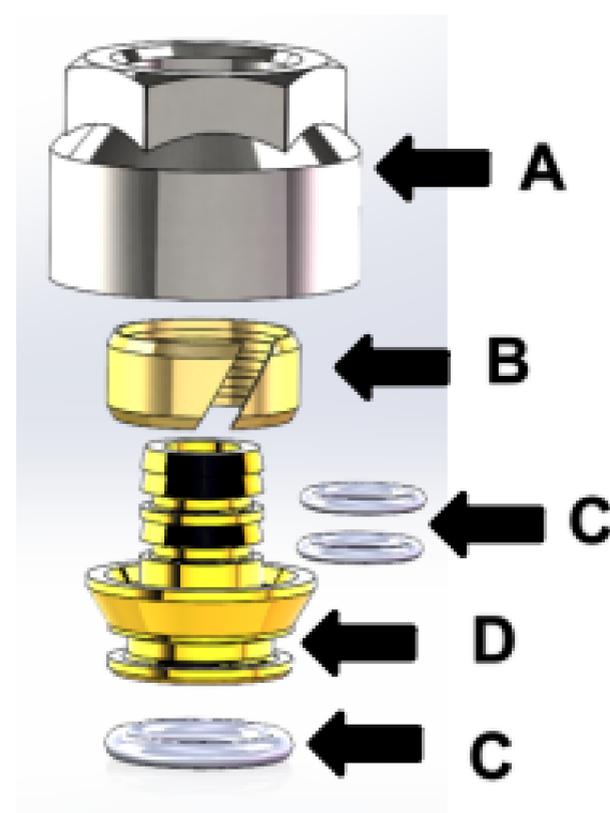

Dimensions

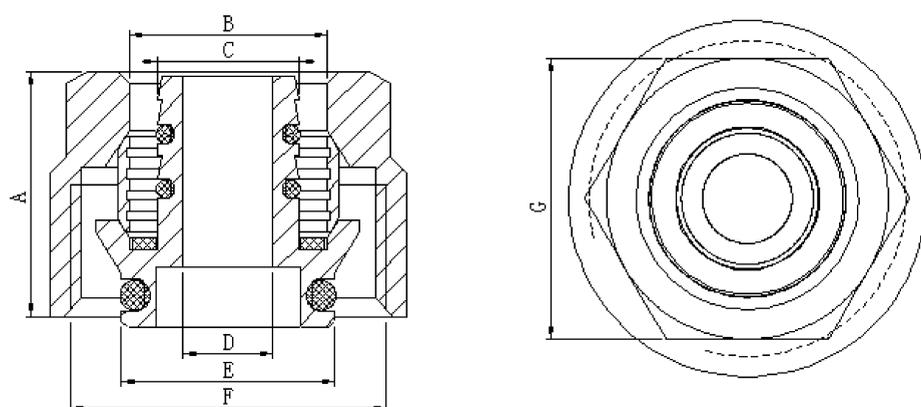

A	B	C	D	E	F	G
20.5	ϕ 16.5	ϕ 11.8	ϕ 7.5	ϕ 17.8	G3/4	SW23.5