




Fränkische

8292674301

GTIN: 4013960393866

Fränkische alpex tee with FT 26-Rp3/4-26

alpex

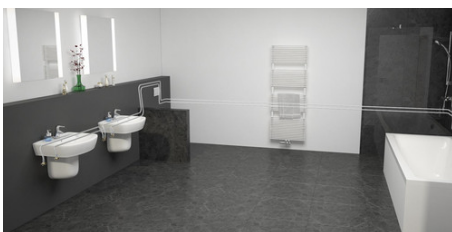

alpex

Die alpex-Familie: Trinkwasserinstallation und Heizungsinstallation mit System

Wer bei der Trinkwasser- und Heizungsinstallation auf Nummer sicher gehen möchte, setzt auf alpex von FRÄNKISCHE. Die einzelnen Komponenten unserer alpex-Familie sind bis ins Detail aufeinander abgestimmt und ergeben ein rundum sicheres System.

8292674301

ITEM DETAILS

Female thread tee adapter according to DIN EN 10226-1 made of dezincification-resistant lead-free silicon bronze for drinking water and heating system installations featuring white fixation rings with integrated inspection holes, fixed stainless steel pressing sleeves and leak function. Pressable with pressing contours F and TH.

CHARACTERISTICS

COMMERCIAL DATA

Minimum order quantity	5 Piece
Order step size	5 Piece

FEATURES

Product group	Fitting with 3 connections (EC003025)
Main colour fitting	Brass
Medium temperature (continuous)	0 - 95 °C
Max. operating pressure at max. medium temperature	10 bar
Material connection 1	Brass
Material quality connection 1	CuZn21Si3P (CW724R)
Surface protection connection 1	Untreated
Surface treatment connection 1	Untreated
Material connection 2	Brass
Material quality connection 2	CuZn21Si3P (CW724R)
Surface protection connection 2	Untreated
Surface treatment connection 2	Untreated
Material connection 3	Brass
Material quality connection 3	CuZn21Si3P (CW724R)
Surface protection connection 3	Untreated
Surface treatment connection 3	Untreated

8292674301

Model	T-piece
Nominal diameter connection 1	DN 20
Outer pipe diameter connection 1	26 mm
Wall thickness, connection 1	3.00 mm
Connection 1	Press sleeve
Contour code connection 1	F/TH
Nominal diameter connection 2	DN 20
Connection 2	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Nominal diameter connection 3	DN 25
Outer pipe diameter connection 3	26 mm
Wall thickness, connection 3	3.00 mm
Connection 3	Press sleeve
Contour code connection 3	F/TH
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)
Length of connection 1	56 mm
Working length connection 1	22 mm
Length of connection 2	22 mm
Working length connection 2	7 mm
Length of connection 3	56 mm
Working length connection 3	22 mm
Max. operating pressure at 20 °C	10 bar
Reducing	Yes
System specific	Yes
With sealing rings/gaskets	Yes

8292674301

CUSTOMS

CE Indicator	No
Customs tariff number	Rohrformstücke, Rohrverschlussstücke und Rohrverbindungsstücke (z.B. Bogen, Muffen), aus Kupferlegierungen (74122000)

LOGISTICS

Delivery time (working days)	15 Days
------------------------------	---------

OTHER

Contains battery	No
REACH Indicator	No
Unlimited shelf life	Yes

MORE PICTURES



8292674301

